



USB8485I

Desktop Mounting

USB to 8 RS-485/422 Isolated Interface Converter

- Supports bilateral switching of data between 1 USB interface and 8 RS-485/422 serial ports
- Low CPU utilization during usage, stable performance
- Autotuning of serial port signal rate, baud rate of serial port 300bps~115200bps
- Serial port supports 15kV electrostatic protection, 2kVAC isolation protection
- Supports 9VDC power supply input
- Supports -40 ~ 75°C wide temperature operation



Introduction


USB8485I is a USB to RS-485/422 isolated interface converter, which can achieve bilateral switching of data between USB interface and 8 RS-485/422 serial ports. The product supports 1 USB interface and 8 RS-485/422 serial ports. Serial port is equipped with 15kV electrostatic protection and 2kVAC isolation protection, which can effectively protect the device from damage. It adopts desktop mounting to meet the requirements of different application fields.

The product provides matched driver program software; USB interface connected to PC will make up a serial COM port in the computer system. PC host can simultaneously communicate with RS-485/422 serial devices via virtual COM port.

Hardware adopts fanless, low power consumption, wide temperature design and has passed rigorous industrial standard tests, which can suit for the industrial scene environment with harsh requirements for EMC. It can be widely used in PLC, Industrial Automatic Control, IC Card Toll Collection System, and Data Acquisition Control System, etc.

Dimension

Unit:mm

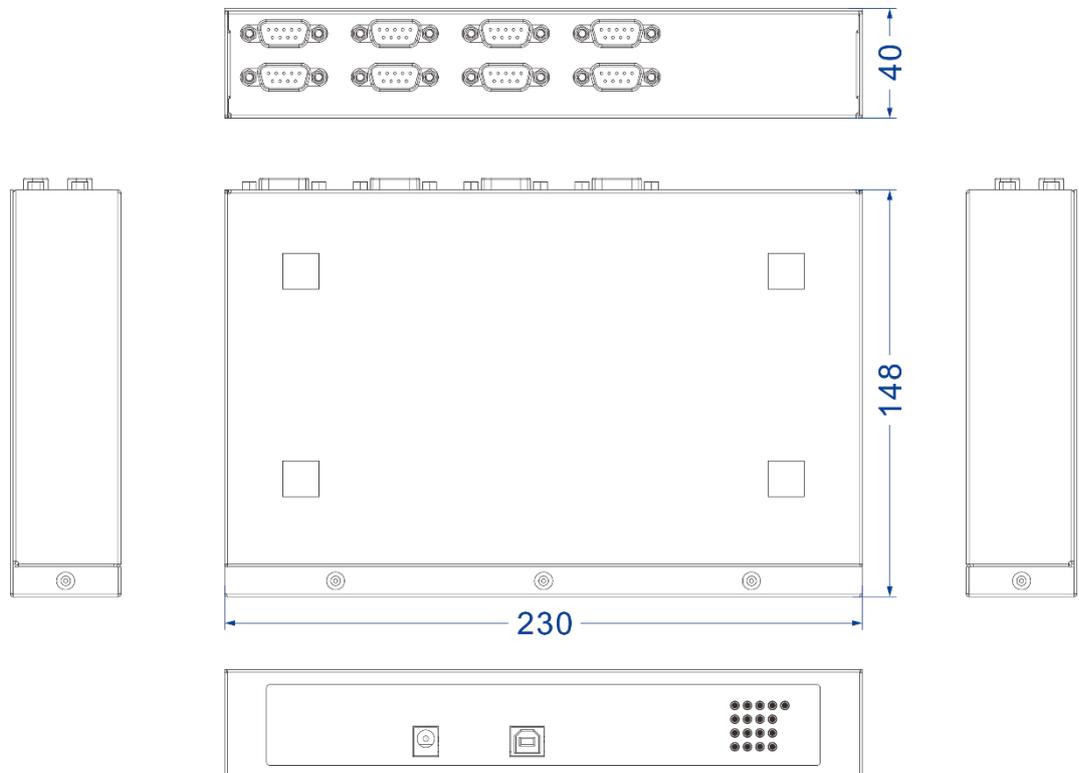

Specification

<p>Serial Port</p>	<p>Standard: EIA RS-485, RS-422 Quantity of serial port: 8 RS-485/422 serial ports RS-485 signal: D+, D-, GND RS-422 signal: T+, T-, GND, R+, R- Baud rate: 300bps~115200bps Data bit: 7bit, 8bit Stop bit: 1bit, 2bit Parity bit: None, Even, Odd, Space, Mark Interface form: DB9, Male (DB9M to 5-pin terminal blocks with additional purchase) Transmission distance: 1200m Directional control: RS-485 direction adopts ADDC (Automatic Data Direction Control) technology Load capacity: RS-485/422 end supports 32-point polling environment Interface protection: 15kV electrostatic protection, 2kVAC isolation protection</p>
<p>USB</p>	<p>Standard: USB 1.1, USB 2.0 Quantity of interfaces: 1 USB interface USB signal: VCC, DATA+, DATA-, GND Transmission rate: high speed 480Mbps, full speed 12Mbps Interface form: USB B-type socket, Female Transmission distance: 5m</p>
<p>Operating System</p>	<p>Windows 2000/XP/Server 2003/Server 2008/Vista, Windows XP embedded, Windows CE 4.2/5.0/5.2/6.0, Linux (above version 2.4), MAC OS-X</p>
<p>Indicator</p>	<p>Power supply indicator, serial port data sending/receiving indicator</p>
<p>Power Requirements</p>	<p>9VDC, adopts DC round head</p>
<p>Power Consumption</p>	<p>No-load: 1.64W@9VDC Full-load: 2.13W@9VDC</p>
<p>Environmental Limits</p>	<p>Operating temperature: -40~75℃ Storage temperature: -40~85℃ Relative humidity: 5% ~ 95% (no condensation)</p>
<p>Physical Characteristics</p>	<p>Housing: metal, IP30 protection grade Installation: desktop mounting</p>

Your Reliable Industrial Communication Expert

Dimension (W x H x D): 230mm×40mm×148mm

Weight: 1.01kg

Certifications	CE, FCC, RoHS
----------------	---------------

IEC 61000-4-2 (ESD, Electrostatic discharge), Level 4

- Air discharge: ±15kV
- Contact discharge: ±8kV

Industrial Standards

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Warranty	3 years
----------	---------



Ordering Information

Available Models	USB	RS-485/422 (with isolation)	Power Supply Range
USB8485I	1	8	9VDC



Address: 3/B, Zone 1, Baiwangxin High Technology Industrial Park, Song Bai Road, Nanshan District, Shenzhen, 518108, China

TEL.: +86-755-26702668 ext 835 FAX: +86-755-26703485

E-mail: ics@3onedata.com

Website: www.3onedata.com

◀ Please scan our QR code for more details

*Product pictures and technical data in this datasheet are only for reference. Updates are subject to change without prior notice. The final interpretation right is reserved by 3onedata.