



# FMC-10/100i

10/100Base-TX to 100Base-FX In-Band  
Managed Converter

The FMC-10/100i family are Fast Ethernet 10/100Base-TX to 100Base-FX In-band managed media converters, which give you the options to choose from the most popular fiber cabling connectors, ST, SC or FC. With advanced features like bandwidth control, this media converter is targeted for customer premises equipment in metro LAN, campus, enterprise and FTx applications. By offering in-band management, this converter can be completely controlled and monitored from a centrally located managed rack controlling all converter settings including band-width control, duplex, and speed configuration. This media converter is completely transparent to Layer 2 and Layer 3 protocols including IEEE 802.1q, VLAN tag, Q in Q, STP, IPX, IP, etc.

## Features


- 10/100Base-TX to 100Base-FX Converter
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Forward 2046 bytes (Max.) packets in switch mode
- Forward 9K jumbo packets in converter mode
- Supports Q in Q double tagged frame transparent
- Supports IEEE 802.1q Tag VLAN pass thru
- Supports local / remote In-band management (Monitor and Configure) by the SNMP manager with FRM220-NMC
- Bandwidth control (Nx32K or Nx512Kbps)
- Supports flow control (Pause)
- Supports remote CPE power fail detect (dying gasp)
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports Loop Back Test
- Supports RMON counter
- Auto Laser Shutdown (ALS)
- Fiber Hardware Reset (FHR)
- Online local / remote f/w upgrade

## Specifications

<b>Optical Interface</b>	Connector	1x9 (SC, ST, FC)
	Data rate	125Mbps
	Duplex mode	Full duplex
	Fiber	MM 62.2/125μm, 50/125μm. SM 9/125μm
	Distance	MM 2km, SM 15/30km WDM 20/40km
<b>Wavelength</b>	MM	1310nm, SM 1310,1550nm
	WDM	1310Tx/1550Rx (Type A) 1550Tx/1310Rx (Type B)
<b>Standards</b>	IEEE 802.3, IEEE 802.3u	
<b>Power Input</b>	Adapter Type : DC 12V	
	Power Built-in Type : AC 100 ~ 240V	
	Power Built-in Type : DC 18 ~ 60V	
<b>LEDs</b>	Power, FX Link, TX SPD, TX Link, TX Duplex, FEF	

<b>Electrical Interface</b>	Connector	RJ-45
	Data rate	10Mbps, 100Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e
	Distance	100 meters
<b>Power Consumption</b>	< 3W	
<b>Temperature</b>	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
<b>Humidity</b>	10 ~ 90% non-condensing	
<b>Dimensions (D x W x H)</b>	Adapter Type : 108 x 23 x 73.4mm	
	Power Built-in Type : 135 x 23 x 73.4mm	
<b>Weight</b>	Adapter Type : 120g	
	Power Built-in Type : 140g	
<b>Certification</b>	CE, FCC	
<b>MTBF</b>	65,000 hrs	

## Application

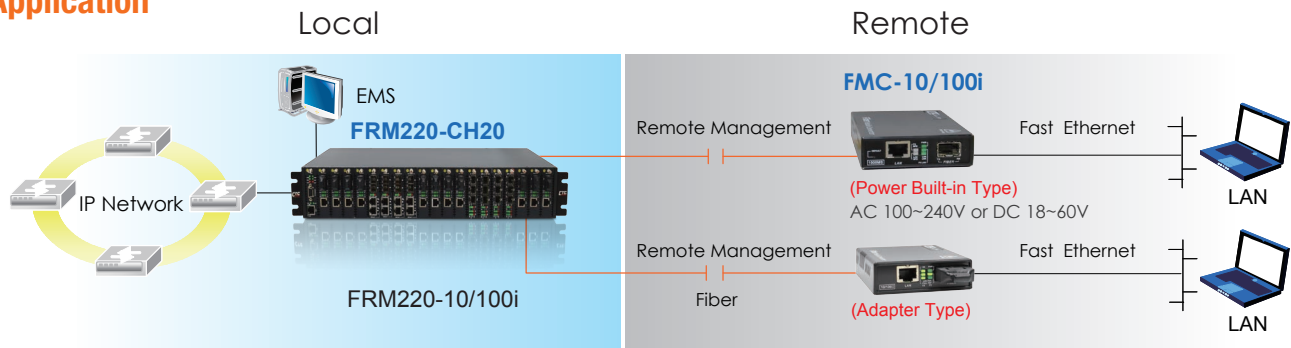

## Ordering Information

Model Name	Description
<b>FMC-10/100i</b>	10/100Base-TX to 100Base-FX In-band managed Media Converter Adapter Type
<b>FMC-10/100i-AC,DC</b>	10/100Base-TX to 100Base-FX In-band managed Media Converter with AC or DC Power
Connector Type	Connectivity Distance
SC, ST, FC	002: 2km 015: 15km 030: 30km 20A: WDM 20km A type 20B: WDM 20km B type 40A: WDM 40km A type 40B: WDM 40km B type

Power Type  
**FMC - 10/100i** - ☐ ☐  
 Example: **FMC - 10/100i - DC**