



SL-350X™ serverLIFT Specifications



General Description:

The SL-350X™ ServerLIFT features the durable design you have come to expect from ServerLIFT, in a light-duty, manual drive unit suitable for any data center, including small server rooms and satellite locations.

With a powerful hand crank, the SL-350X™ ServerLIFT loads IT equipment up to 350 lbs. from the side for optimum alignment over the full range of most any standard 19" rack.

Features:

- Side loading with 6" of movement to either side.
- Compact, maneuverable design.
- Hand Crank System easily lifts 350 lbs.
- Sleek enclosure shields cable and winch for a clean, safe, environment.
- Heavy duty platform resists sagging and twisting.

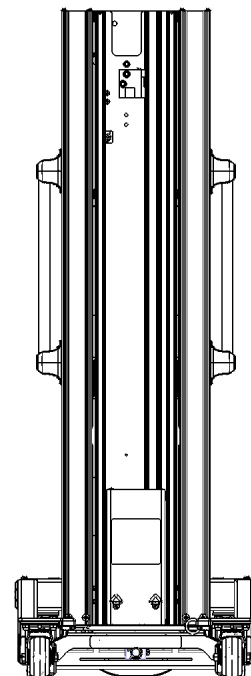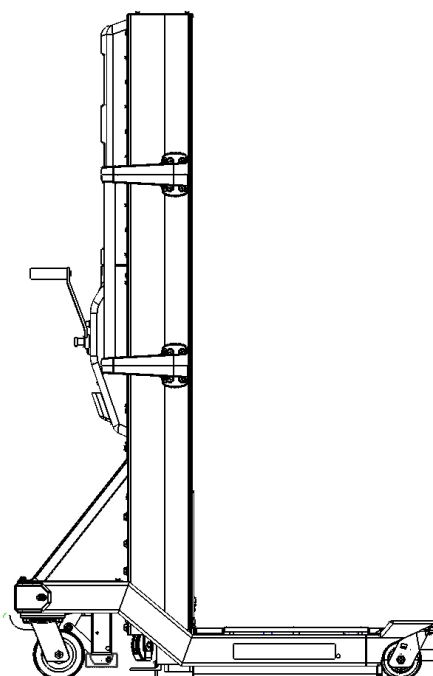

Product Dimensions	US	Metric
Unit Height (Lowered):	5 ft 8 in	1.73 m
Unit Height (Raised):	9 ft 2.8 in	2.81 m
Length	3 ft 8 in	1.12 m
Width	2 ft 0.5 in	0.62 m

Capacity and Weight	US	Metric
Load Capacity-Platform Center	350 lbs	159 kg
Load Capacity-Edge	200 lbs	91 kg
Total Unit Weight	390 lbs	176.9 kg

Working Dimensions	US	Metric
Platform Height-Extended	8 ft	2.44 m
Platform Height-Stowed	5.3 in	13.5 cm
Platform-Movement (per side)	6 in	15.24 cm
Movable Platform-Width	14.6 in	36.8 cm
Total Platform Width	21 in	53 cm
Platform Length	24 in	61 cm
Rear Caster Diameter	5 in	12.7 cm
Front Caster Diameter	4 in	10.2 cm
Caster Width	2 in	5.08 cm